


B-6L1

BOLLARD

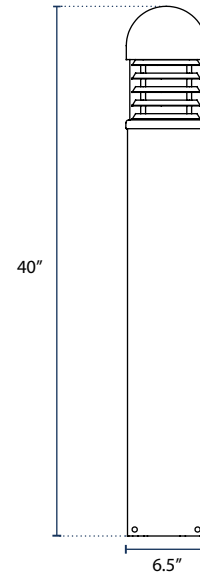

SPECIFICATIONS

Casting

Extruded Aluminum

Finish

Die-Cast Aluminum

CRI

>70

Efficiency

70 lm/W

Driver

Meanwell

Mounting

Qty. (3) 3/8"x16" Anchor Bolts
Surface

Warranty

5-Year

Lamp Type

Integrated LED Board

LED's

Available Upon Request

Voltage

120-277V

Beam Angle

150°

ORDERING

BOLLARD

CCT

WATTAGE

VOLTAGE

FINISH

B-6L1

25W

100-277V

3000K

4000K

5000K

DB Dark Bronze

BK Black