


B-6L2

BOLLARD

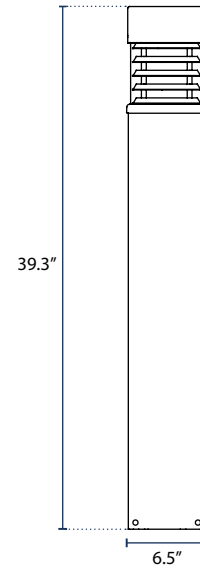

SPECIFICATIONS

Casting

Extruded Aluminum

Finish

Die-Cast Aluminum

Voltage

120-277V

Beam Angle

150°

Driver

Meanwell

Mounting

 Qty. (3) 3/8"x16" Anchor Bolts
 Surface

CRI

>70

Efficiency

70 lm/W

LED's

Available Upon Request

Warranty

5-Year

Lamp Type

Integrated LED Board

ORDERING

BOLLARD

CCT

WATTAGE

VOLTAGE

FINISH

B-6L2
25W
100-277V
3000K
4000K
5000K
DB Dark Bronze

BK Black