


**B-6L2**  
BOLLARD

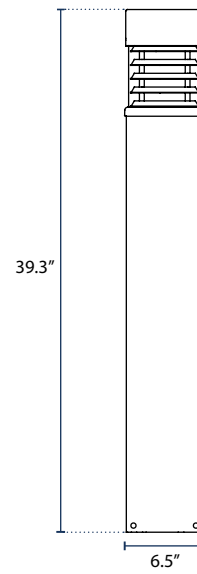

**SPECIFICATIONS**

**Casting**

Extruded Aluminum

**Finish**

Die-Cast Aluminum

**CRI**

>70

**Efficiency**

70 lm/W

**Driver**

Meanwell

**Mounting**

Qty. (3) 3/8"x10" Anchor Bolts

**Warranty**

5-Year

**LED's**

Available Upon Request

**Voltage**

120-277V

**Beam Angle**

150°

**ORDERING**

BOLLARD

LAMP TYPE

CCT

WATTAGE

VOLTAGE

MOUNTING

FINISH

**B-6L2**

**INTEGRATED LED BOARD**

**3000K**  
**4000K**  
**5000K**

**25W**

**100-277V**

**SURFACE**

**DB** Dark Bronze  
**BK** Black