


B-8L1
BOLLARD

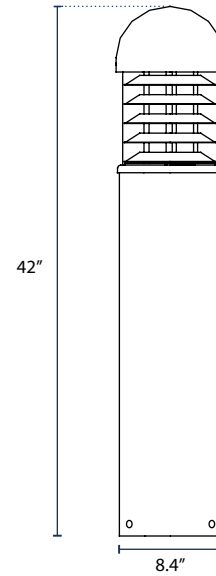

SPECIFICATIONS

Casting

Extruded Aluminum

Finish

Die-Cast Aluminum

CRI

>70

Efficiency

70 lm/W

Driver

Meanwell

Mounting

Qty. (3) 3/8"x10" Anchor Bolts

Warranty

5-Year

LED's

Available Upon Request

Voltage

120-277V

Beam Angle

150°

ORDERING

BOLLARD

LAMP TYPE

CCT

WATTAGE

VOLTAGE

MOUNTING

FINISH

B-8L1

INTEGRATED LED BOARD

3000K
4000K
5000K

25W

100-277V

SURFACE

DB Dark Bronze
BK Black