


B-8R1

BOLLARD

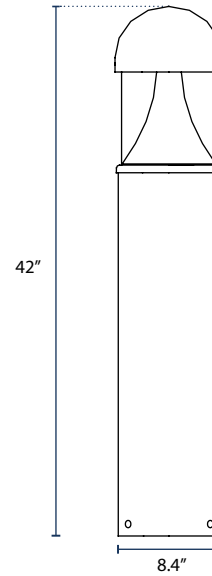

SPECIFICATIONS

Casting

Extruded Aluminum

Finish

Die-Cast Aluminum

Voltage

120-277V

Beam Angle

150°

Driver

Meanwell

Mounting

 Qty. (3) 3/8"x16" Anchor Bolts
 Surface

CRI

>70

Efficiency

100 lm/W

LED's

Available Upon Request

Warranty

5-Year

Lamp Type

Integrated LED Board

ORDERING

BOLLARD	CCT	WATTAGE	VOLTAGE	FINISH
B-8R1			100-277V	
	3000K	25W		DB Dark Bronze
	4000K	35W		BK Black
	5000K			