


B-8R2
BOLLARD

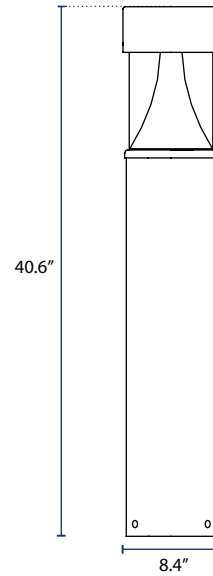

SPECIFICATIONS

Casting

Extruded Aluminum

Finish

Die-Cast Aluminum

CRI

>70

Efficiency

100 lm/W

Driver

Meanwell

Mounting

Qty. (3) 3/8"x10" Anchor Bolts

Warranty

5-Year

LED's

Available Upon Request

Voltage

120-277V

Beam Angle

150°

ORDERING

BOLLARD	LAMP TYPE	CCT	WATTAGE	VOLTAGE	MOUNTING	FINISH
B-8R2	INTEGRATED LED BOARD			100-277V	SURFACE	
		3000K	25W			DB Dark Bronze
		4000K	35W			BK Black
		5000K	50W			
			60W			