


## B-8R3

BOLLARD

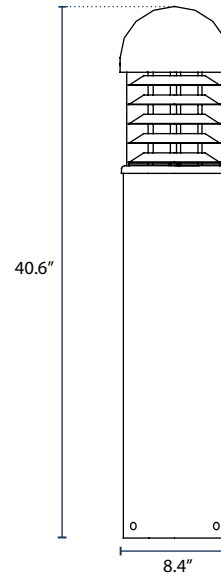

### SPECIFICATIONS

**Casting**

Extruded Aluminum

**Finish**

Die-Cast Aluminum

**Voltage**

120-277V

**Beam Angle**

150°

**Driver**

Meanwell

**Mounting**

 Qty. (3) 3/8"x16" Anchor Bolts  
 Surface

**CRI**

&gt;70

**Efficiency**

40 lm/W

**LED's**

Available Upon Request

**Warranty**

5-Year

**Lamp Type**

Integrated LED Board

### ORDERING

BOLLARD	CCT	WATTAGE	VOLTAGE	FINISH
<b>B-8R3</b>			<b>100-277V</b>	
	<b>3000K</b>	<b>25W</b>		<b>DB</b> Dark Bronze
	<b>4000K</b>	<b>35W</b>		<b>BK</b> Black
	<b>5000K</b>			