


B-SQ
SOLAR BOLLARD

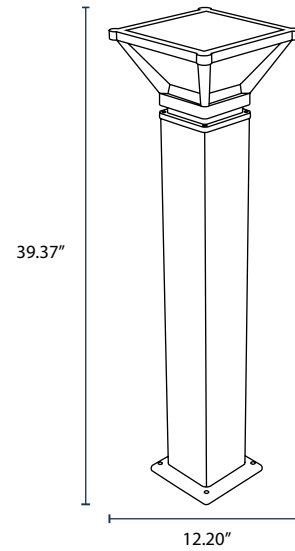

SPECIFICATIONS

Casting

Die Cast Aluminum

Battery

Capacity: 38 Wh
Autonomy: 24 hrs w/Full Charge
Charging Time: 6 hrs
Working Temp: -10°C to 70°C

Finish

Polyester Powder-Coat
Electrostatically
Applied & Thermocured

Mounting

Qty. (4) Anchor Bolts

Dimensions

39.37" x 12.20" x 12.20" (width
measurement at top of bollard)

Energy

Solar Panel: 10 Watts

CRI

>70

Efficiency

120 lm/W

Certificatons

IP65 / CE / DARK SKY

Operating Schedule

| Sunset | Night | Sunrise |
|--------|-------|---------|
| 14h | | |

20% Continuous Light Output +
Motion Activated to 100% Output

*Contact us for more program options

ORDERING

BOLLARD

B-SQ

CCT

4000K
5000K

WATTAGE

4W
4W

FINISH

BK
BK Semi Gloss Black