


B-SR
SOLAR BOLLARD

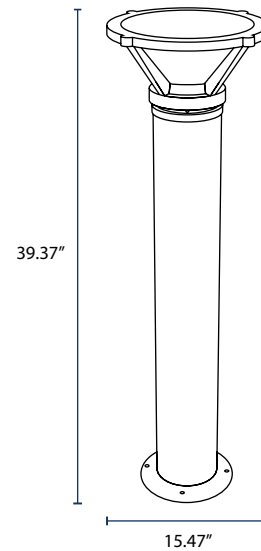

SPECIFICATIONS

Casting

Die Cast Aluminum

Battery

Capacity: 38 Wh
Autonomy: 24 hrs w/Full Charge
Charging Time: 6 hrs
Working Temp: -10°C to 70°C

Finish

Polyester Powder-Coat
Electrostatically
Applied & Thermocured

Mounting

Qty. (4) Anchor Bolts

Dimensions

39.37" x 15.47" (width
measurement at top of bollard)

Energy

Solar Panel: 10 Watts

CRI

>70

Efficiency

120 lm/W

Certifications

IP65 / CE / DARK SKY

Operating Schedule

Sunset	Night	Sunrise
14h		

- 20% Dim +
100% On during 20sec

*Contact us for more program options

ORDERING

BOLLARD	LAMP TYPE	CCT	WATTAGE	MOUNTING	FINISH
B-SR	INT		4W	SURFACE	BK
	INT Integrated LED	4000K 5000K	4W	SURFACE	BK Semi Gloss Black