


PT-M1

POST TOP

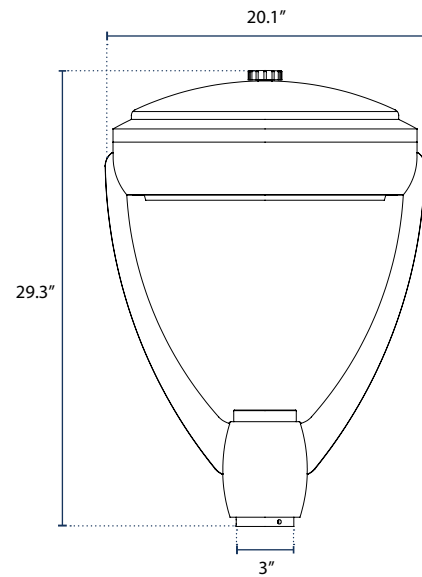

SPECIFICATIONS

Casting

Die Cast Aluminum

Driver

Meanwell

LED's

Available Upon Request

Finish

Polyester Powder-Coat
Electrostatically
Applied & Thermocured

Mounting

3" Inside Diameter

Post Top

LED
Height: 29.3"
Width: 20.1"

Pole

Fits all 3", 4", and 5" Brandon
Industries Base and Poles

Voltage

100-277V

CRI

>70

Distribution


Type V

ORDERING

POST TOP	LAMP TYPE	CCT	WATTAGE	VOLTAGE	OPTICS	MOUNTING	FINISH
PT-M1	INTEGRATED LED BOARD			100-277V	TYPE V	POLE/TENON	
		3000K	45W				BK Semi Gloss Black
		4000K	60W				DB Textured Dark Bronze
		5000K					

PT-M2

POST TOP

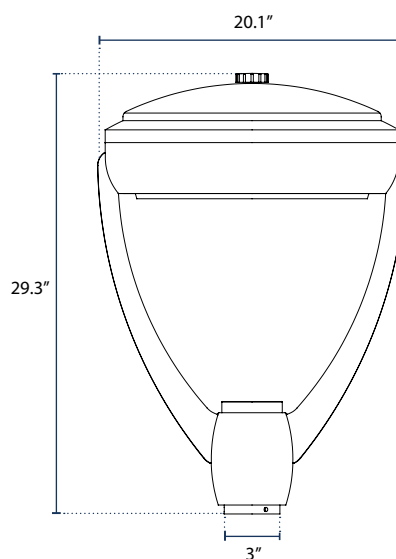

SPECIFICATIONS

Casting

Die Cast Aluminum

Driver

Meanwell

LED's

Available Upon Request

Finish

Polyester Powder-Coat
Electrostatically
Applied & Thermocured

Mounting

3" Inside Diameter

Post Top

LED
Height: 29.3"
Width: 20.1"

Pole

Fits all 3", 4", and 5" Brandon
Industries Base and Poles

Voltage

100-277V

CRI

>70

Distribution

Type V

ORDERING

POST TOP	LAMP TYPE	CCT	WATTAGE	VOLTAGE	OPTICS	MOUNTING	FINISH
PT-M2	INTEGRATED LED BOARD			100-277V	TYPE V	POLE/TENON	
		3000K	70W				BK Semi Gloss Black
		4000K	100W				DB Textured Dark Bronze
		5000K	120W				